


R-Panel - Roofing Panels

USED FOR: 



- Finishes: Valspar WeatherX and Acrylic Coated Galvalume® Gauges: 26 ga 36" panel coverage, 1-1/4" rib height Applies over open framing or solid substrate Exposed fastened metal building panel Trapezoidal rib on 12" centers Minimum roof slope: 1:12

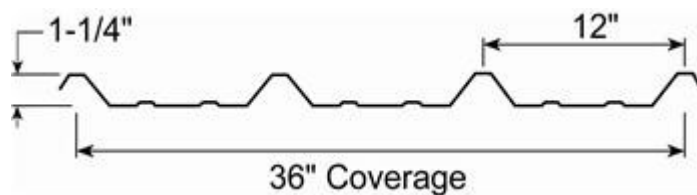

Testing

- UL 580, Class 90 Wind Uplift, Construction #161
- UL 2218, Class 4 Impact Resistance
- UL 790, Class A Fire Resistance Rating
- ASTM E #45598 Diaphragm Test
- Texas Windstorm Evaluation RC-198



2010 FBC Approved 26 ga over 16 ga Purlins 10999.7 26 ga over 16 ga Girts 9482.4 26 ga over 1/2" Ply-wood 14645.11