


Strong Rib - Roofing Panels

USED FOR: 

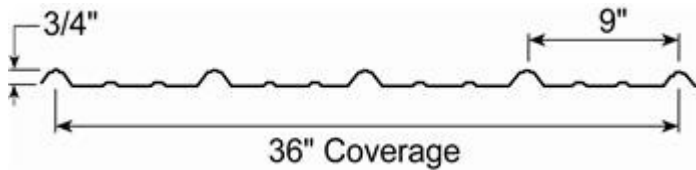

- Gauges: 26 ga and 29 ga standard
- 36" panel coverage, 3/4" rib height
- Bell top trapezoidal rib on 9" centers
- Exposed fastened, low profile panel
- Applies over open framing or solid substrate

Minimum roof slope: 3:12

Testing

- UL 2218, Class 4 Impact Resistance
- UL 790, Class A Fire Resistance Rating
- ASTM E 564-95 Diaphragm Test
- UL 580, Class 90 Wind Uplift, Construction #560 and #584
- Texas Windstorm Evaluation RC-161

2010 FBC Approved 29 ga over 2x Purlins 10999.4 29 ga over 1/2" Plywood 14645.9 29 ga over 2x Girts 9482.3 29 ga over 5/8" Plywood 11560.1 29 ga over 7/16" OSB 14645.8 26 ga over 16 ga Purlins

