




PBR Panel - Roofing Panels

USED FOR: 

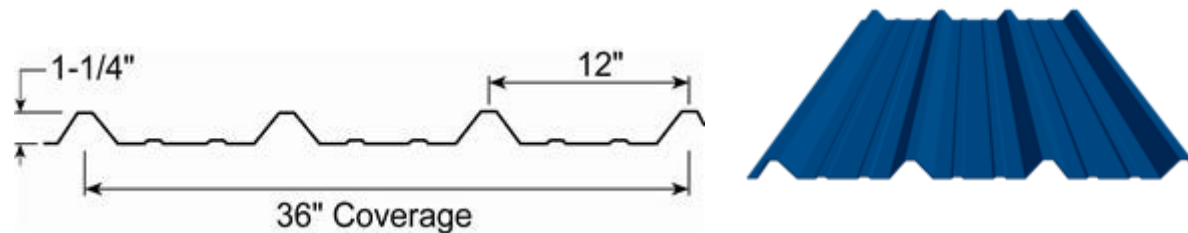

Finishes: Valspar WeatherX and Acrylic Coated Galvalume®

- Gauges: 26 ga
- Color: White and Galvalume
- 36" panel coverage, 1-1/4" rib height
- Applies over open framing or solid substrate
- Exposed fastened metal building panel
- Trapezoidal rib on 12" centers
- Minimum roof slope: 1:12



Testing

- UL 2218, Class 4 Impact Resistance
- UL 790, Class A Fire Resistance Rating
- ASTM E 564-95 Diaphragm Test
- UL 580, Class 90 Wind Uplift, Construction #560 and #584
- Texas Windstorm Evaluation RC-161



2010 FBC Approved 29 ga over 2x Purlins 10999.4 29 ga over 1/2" Plywood 14645.9 29 ga over 2x Girts 9482.3 29 ga over 5/8" Plywood 11560.1 29 ga over 7/16" OSB 14645.8 26 ga over 16 ga Purlins 10999.3 26 ga over 16 ga Girts 9482.2 26 ga over 5/8" Plywood 14645.7 0.032" Aluminum over 7/16" OSB 14645.5